



# Cable Fitting Instructions For Garador Mk3c


1. Remove plastic cover on the spring unit box by sliding to one side. Remove any pieces of broken cable.

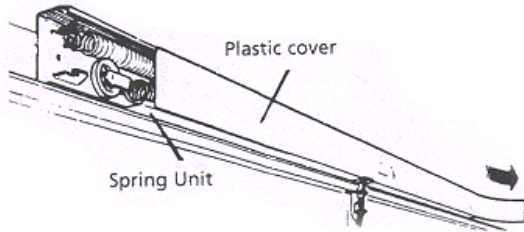

2.
  - a. Insert one end of the new cable over the pulley wheel mounted on the link arm bracket. Place a stout screwdriver through the eye of the cable, as shown.
  - b. Thread the other end of the cable downwards and around the pulley wheel at the end of the spring. Finally, fasten eye over the hook mounted on the spring box. N.B This last operation begins the tensioning of the spring.

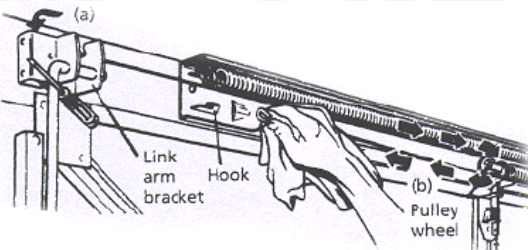


3. Replace plastic cover sliding it to a central position.
4. Pull cable downwards until the spring retaining bracket can be located in the socket at the back of the spring unit.

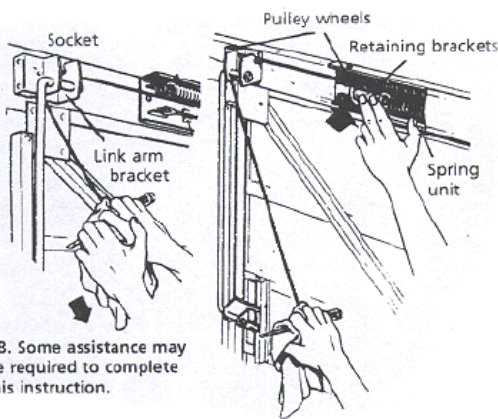

NB. Some assistance may be required to complete this instruction.

5. Pass free end of cable downward inside guide channel behind link arm. Finally, attach eye at end of the cable to hook on the roller spindle.

6. Take up slack wire by pulling cable across the door in the direction of the arrow. Ensure that the cable is snugly bedded in the grooves of both pulley wheels. Pull the cable until the retaining bracket at the end of the spring is released from its socket (it is recommended that a piece of cloth is used between cable and hand). Some assistance may be required using the free hand to lightly pull the retaining bracket clear of its socket should it not completely release. When the retaining bracket has released, allow the spring to gently take up the slack wire.

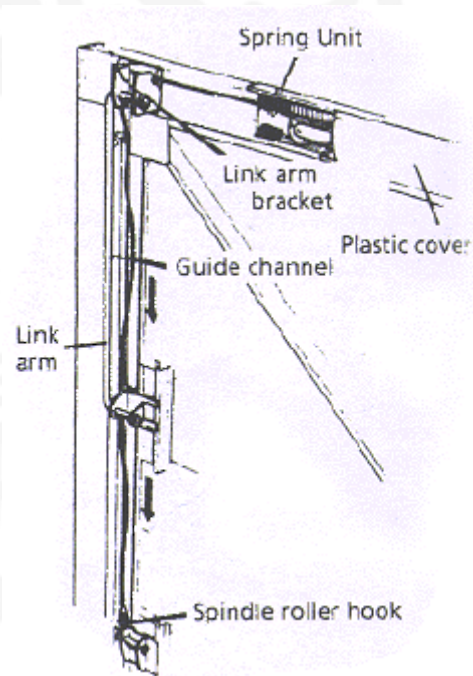

**Warning** - It is important that this instruction is followed correctly as personal injury, damage to cable or loss of pre-tension could occur.

7. Lubricate roller spindles, top latch and all other moving parts. To ensure continued ease of operation lubricate periodically.

All work is undertaken at your own risk.

SKU: GAS1010, GAS1011, GAS1020